


# WG8 AND WG10 CANNING SYSTEMS

Innovative dual-lane systems offering superior yield and production efficiency

UP TO  
**90 or 100**  
CANS PER MINUTE

**Purge & Fill Station:** Automatic  
**Can Lid Placement:** Automatic  
**Seamer Station:** Automatic

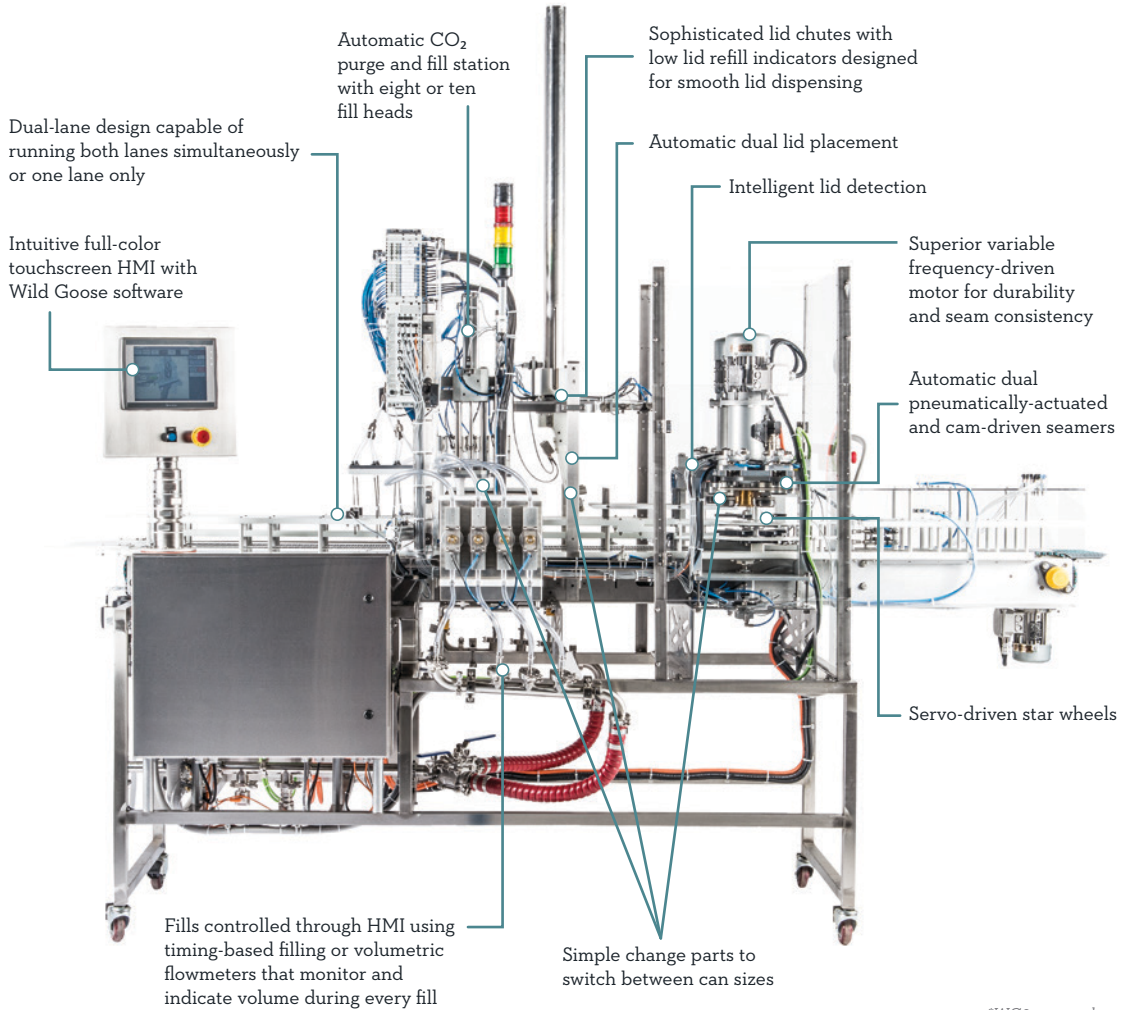

Dual-lane design capable of running both lanes simultaneously or one lane only

Intuitive full-color touchscreen HMI with Wild Goose software

Automatic CO<sub>2</sub> purge and fill station with eight or ten fill heads

Sophisticated lid chutes with low lid refill indicators designed for smooth lid dispensing

Automatic dual lid placement

Intelligent lid detection

Superior variable frequency-driven motor for durability and seam consistency

Automatic dual pneumatically-actuated and cam-driven seamers

Servo-driven star wheels

Fills controlled through HMI using timing-based filling or volumetric flowmeters that monitor and indicate volume during every fill

Simple change parts to switch between can sizes

*\*WG8 system shown*

## TECHNICAL SPECIFICATIONS

**Dimensions:** 130.5" L x 41" W x 109" H (90" H when lid tubes removed) • **Deck Height:** Adjustable 44"-46" installed on feet

**Weight:** 1,400 lb • **Power:** Three-phase (200V-240V) 18A @ 208VAC, 50/60 Hz; knockout provided for your electrician to wire

**Air:** Clean, dry compressed air required at 90 psi, 22.9 cfm; refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required

**Depalletization:** Requires use of depalletizing equipment