

EUROPEAN CONFIGURATIONS





CE-certified systems with an unsurpassed compact footprint

Available for Gosling™, Single-Lane Evolution Series™ and Wild Goose Fusion™ systems

OPTIONS UP TO
3000
CANS PER HOUR

Purge & Fill Station: Automatic
Can Lid Placement: Automatic
Seamer Station: Automatic

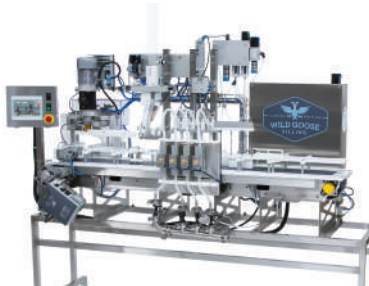

	GOSLING™ CE	EVOLUTION SERIES™ CE	WILD GOOSE FUSION™ CE
Cans per Hour	Up to 720 cph	Up to 900, 1800, 2100, 2400, 3000 cph	Up to 900, 1800, 2400 cph
Fill Heads	1	1, 2, 3, 4, 5	2, 4, 6
Dimensions	107 cm L x 61 cm W x 104-109 cm H	246 cm L x 107 cm W x 290 cm H (203 cm H when lid tube removed)	224 cm L x 97 cm W x 295 cm H (205 cm H when lid tube removed)
Deck Height	Entry and exit height of 30.5-35.5 cm above base surface	117 cm with casters; adjustable 112 cm - 117 cm without casters	101.5 cm with casters; adjustable 96.5 cm - 106.5 cm
Power	Single-phase 200V-240V	Single-phase 12A @ 230VAC, 50/60 Hz; knockout provided for your electrician to wire	Single-phase 12A @ 230VAC, 60 Hz; knockout provided for your electrician to wire
Air	Clean, dry compressed air required at 6.5-7 bar, 185 L/min Refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required	Clean, dry compressed air required at 6.2 bar, 20.7 m³/h Refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required	Clean, dry compressed air required at 6.2 bar, 20.7 m³/h Refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required
Upgradeable	Not applicable	Field upgrade service available	Field upgrade service available

Wild Goose is your local partner in Europe for beverage packaging.

With our offices and warehouse in The Netherlands, Spain, Hungary and Italy, we are just around the corner, supporting all your packaging needs.