

GOSLING SPIRIT™



Canning for Craft Distilleries

The Gosling Spirit™ offers small batch, entry-level packaging for cocktails, spirits, coffee, infused drinks and more.

Package your carbonated cocktails, still liquors and other high-proof and ready-to-drink beverages in single-serve 100-milliliter steel cans.

The Gosling Spirit allows distilleries and craft beverage producers to expand product portfolios to include convenient, consumer-friendly 100 mL cans of premium still and sparkling beverages.

Portable and infinitely recyclable, cans are the perfect option for on-the-go consumers where plastic or glass may not be suitable or sustainable.

SPEED UP TO
14 CANS PER MINUTE



BEVERAGE QUALITY CONTROL

Maximizes your packaged product shelf life



FLAVOR PROTECTION

Limits oxygen to maintain beverage freshness & taste




SMALL-RUN CAPABILITY

Cans small volumes with ease from a variety of pressurized or unpressurized vessels

Quality craft canning,
simplified.



GOSLING SPIRIT™

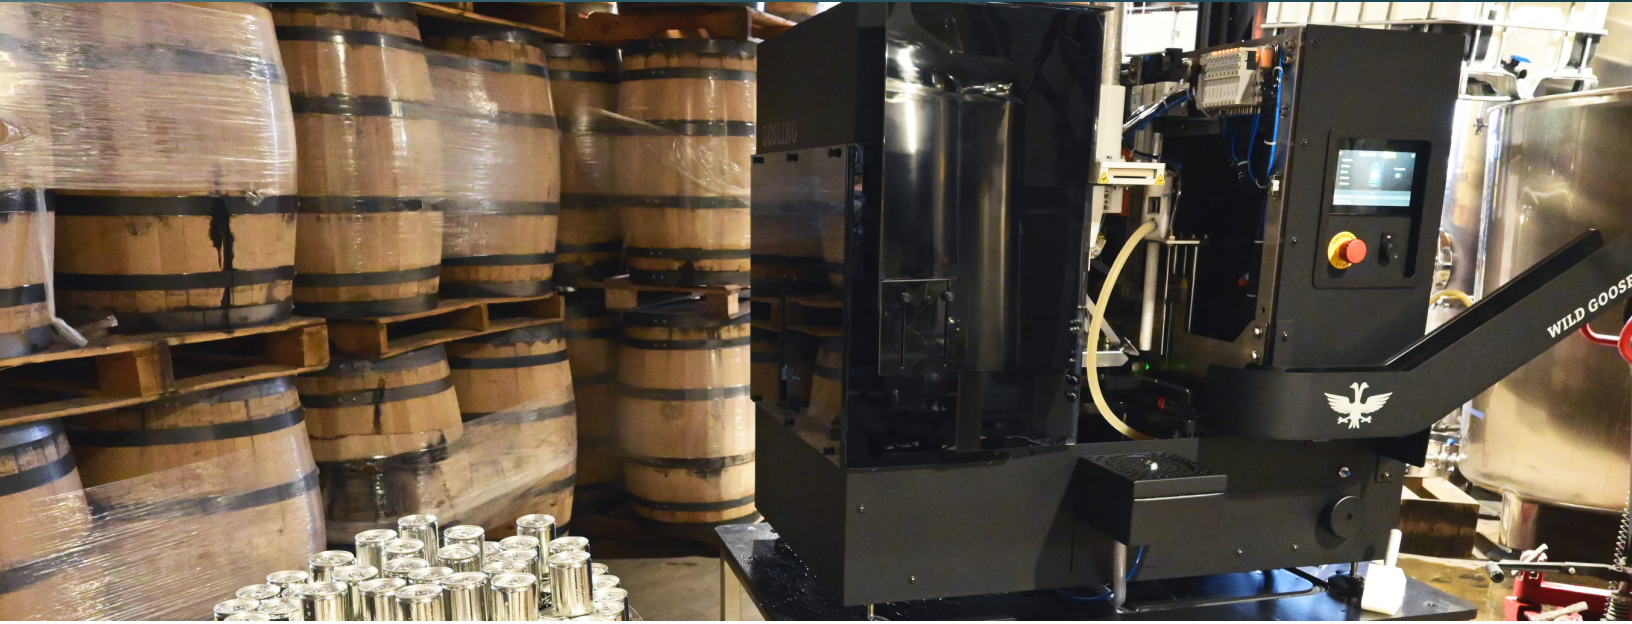

FEATURES

PRECISION SEAMING

Patented Wild Goose seaming technology, specially engineered to provide consistent seams for steel cans, helps prevent flavor loss, spoilage and leaks.

ACCURATE FILLING

Controlled flow methods deliver regulated, accurate fill volumes from tank or keg to minimize waste and meet packaged yield specifications.

D.O. PREVENTION

Dissolved oxygen mitigation technologies work together to help prevent beverage oxidation and maximize your packaged product taste and shelf life.

COMPACT SIZE

With a small footprint and modular accessory options, the ultracompact Gosling Spirit fits in small spaces and stows away easily when not in use.

MULTI-BEVERAGE FLEXIBILITY

Designed for both non-carbonated and carbonated beverages, the Gosling Spirit supports diversified canning goals to expand sellable product portfolios.

TECHNICAL SPECIFICATIONS

Speed Up To:

Based on 100 mL can at optimal product conditions

- 14 cans/min
- 840 cans/hr
- 35 cases/hr
- 2.5 bbl/hr
- 78.7 gal/hr
- 3.0 hL/hr
- 0.3 m³/hr
- 298 L/hr

Can Size:

100 mL 202 steel can body with 200 lid type

Dimensions:

44" L x 26" W x 41-43" H (112 cm L x 66 cm W x 104-109 cm H)

Deck Height:

Entry and exit height of 12-14" (30.5-35.5 cm) above base surface

Standard Configuration:

Tabletop system with adjustable leveling feet

Weight:

275 lb (125 kg)

SYSTEM UTILITIES

Power Options:

- Single-phase 13A @ 115VAC, 50/60 Hz
- Single-phase 200V-240V

CO₂:

Required at 12-25 psi / 0.8-1.7 bar dependent on add-on options

Air:

Clean, dry compressed air required at 6.5 scfm @ 95-100 psi (185 L/min @ 6.5-7.0 bar) in accordance with ISO 8573-1:2010 (-4:-). Dew Point < 37° F (3° C)

OPTIONAL ACCESSORIES

- Variable-Stage Flow Mode
- DO Buster™ CO₂ Tunnel
- Pre- and Post-Rinse
- GooseNeck™ Infeed
- Liquid Nitrogen Dosing
- Mobile Cart
- Advanced Tool Kit
- Spare Parts Kit
- SPA Treatment (Service Partnership Agreement)

Warranty:

Standard 1-year warranty; Extended warranty available



Wild Goose Filling
633 CTC Boulevard, Suite 100
Louisville, CO 80027 USA

+1 720-406-7442
www.WildGooseFilling.com
Sales@WildGooseFilling.com

