


MOBILE CONFIGURATIONS

Durable, compact mobile systems with unbeatable consistency and efficient performance

Available for Gosling™, Single-Lane Evolution Series™ and Wild Goose Fusion™ systems

OPTIONS UP TO
50
CANS PER MINUTE

Purge & Fill Station: Automatic
Can Lid Placement: Automatic
Seamer Station: Automatic

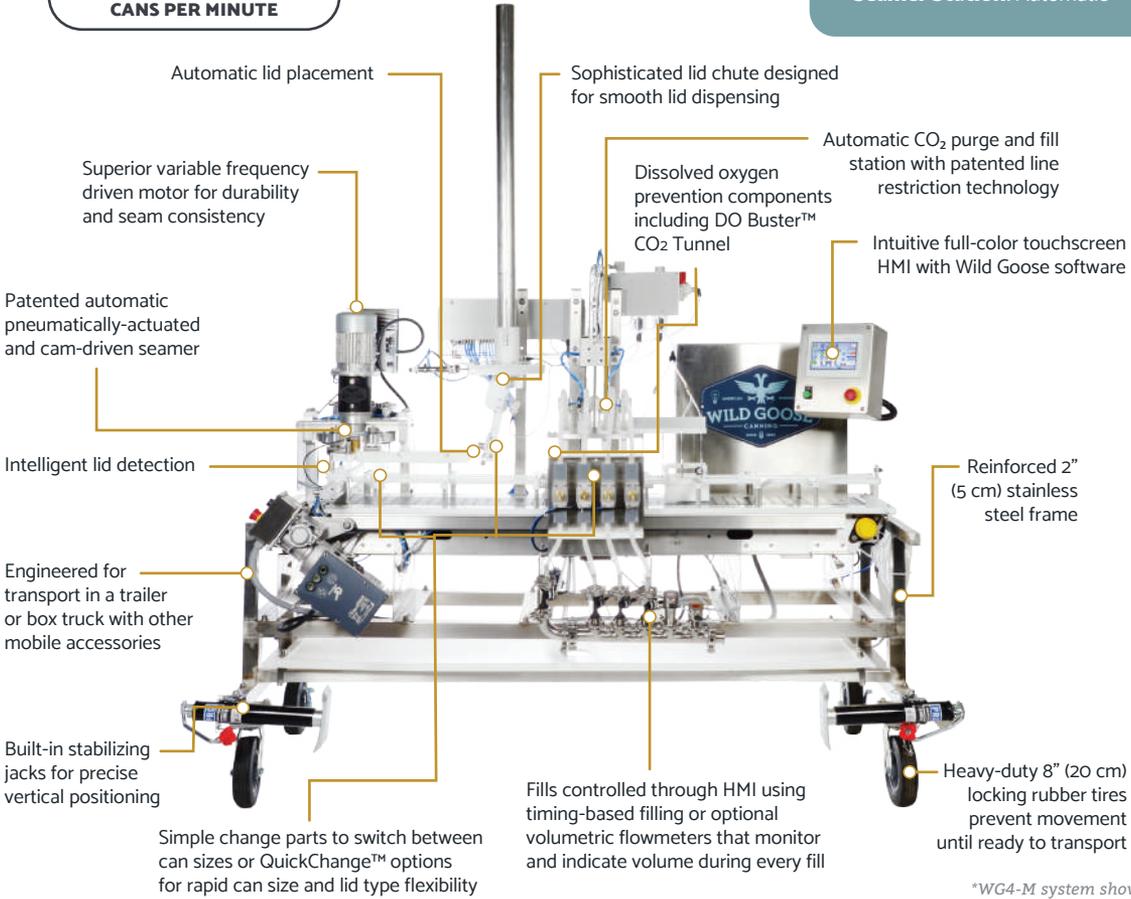

*WG4-M system shown
European models include additional CE guarding

TECHNICAL SPECIFICATIONS

MOBILE EVOLUTION SERIES

- Dimensions:** 83.5" L x 43" W x 103" H (68" H when lid tube removed)
- Deck Height:** Adjustable 36"-46" with included jack stands
- Weight:** Up to 835 lb
- Power:** Single-phase 17A @ 115VAC, 50/60 Hz (single-phase 200V-240V or three-phase 200V-240V available)
- Air:** Clean, dry compressed air required at 90 psi, 12.2 cfm; refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required
- Upgradeable:** Field upgrade service available

EUROPEAN MOBILE EVOLUTION SERIES

- Dimensions:** 227 cm L x 98 cm W x 262 cm H (173 cm H when lid tube removed)
- Deck Height:** Adjustable 91 cm - 117 cm with included jack stands
- Weight:** Up to 900 kg
- Power:** Single-phase 12A @ 230VAC, 50/60 Hz; knockout provided for your electrician to wire
- Air:** Clean, dry compressed air required at 6.2 bar, 20.7 m3/h; refrigerated air dryer and coalescing air filter rated to 0.10-0.01 micron required
- Upgradeable:** Field upgrade service available

Mobile configurations also available for Gosling™ and Wild Goose Fusion™ systems. Contact us for details.